



TITLE: UNIV OF BRUSSELS - JST SHR-05V-S-B TO JST SHR-05V-S-B, 180mm

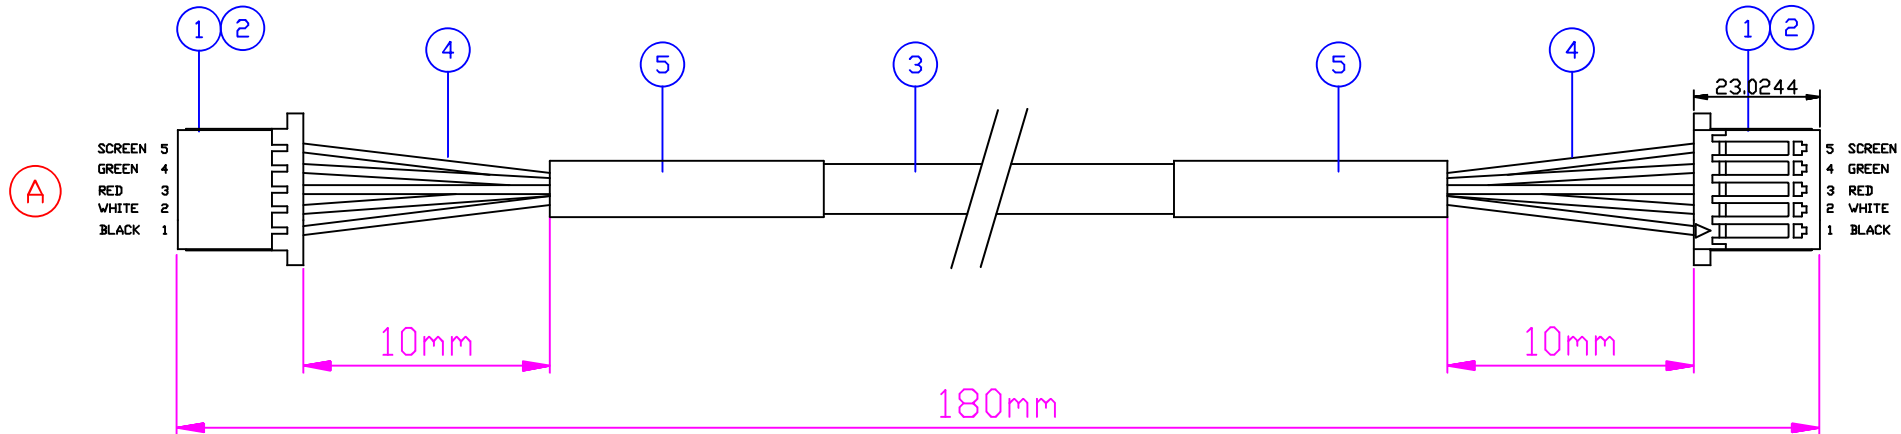

CRIMP CHECK

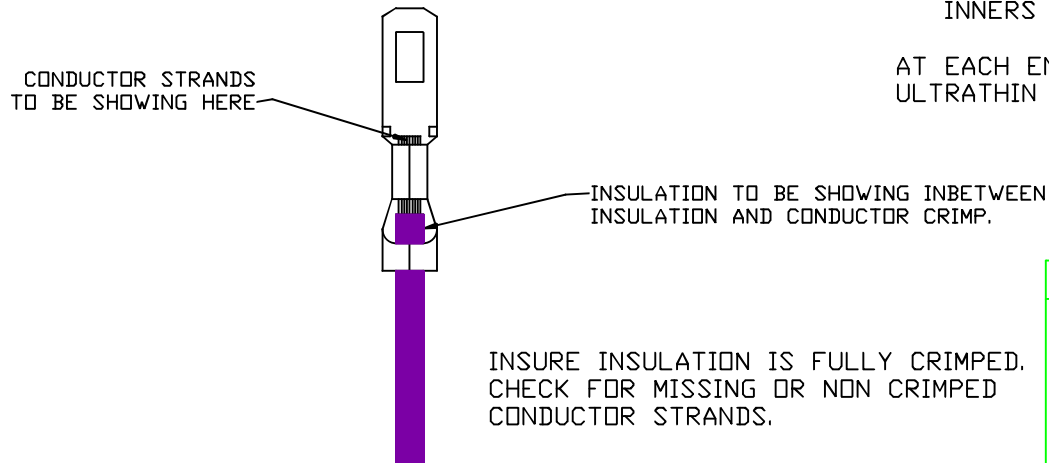

CABLE CUT LENGTH 174mm

STRIP LENGTHS:

Ⓐ OUTER 12mm Ⓑ OUTER 12mm
INNERS 2mm INNERS 2mm

AT EACH END COVER DRAIN WIRE WITH
ULTRATHIN HEATSHRINK

TEST:

Ⓐ Ⓑ
1 _____ 1
2 _____ 2
3 _____ 3
4 _____ 4
5 _____ 5 SCREEN

Iss	Date	ALTERATION	Apvd	ITEM	REF NUMBER	DESCRIPTION	No. OFF	REMARKS
				1	M9683	JST 5V HOUSING SHR-05V-S-B	2	
				2	M9568	JST CONTACT SSH-003T-P0.2	10	
				3	M2364	4-CORE 28AVG SCREENED CABLE	95mm	ALPHA WIRE 3306
				4	M3215	1.2mm ULTRATHIN HEAT SHRINK	2 x 10mm	
				5	M3111	H20 x 20 NEDPRENE SLEEVE	2	
1	07/04/20	Drawn By S. MARSH						
Tol ± 10mm			Scale NTS					

ALL DIMS IN mm